

Wireless Car Smart Box

CarWave CB6A&CB6B

INSTALLATION MANUAL

Contents

Chapter 1	Installation	1
1.1	Installation Components Overview	1
1.2	Why Do You Need a Y-Cable?	1
1.3	Connection Process	2
Chapter 2	Important Notice	4

Chapter 1 Installation

1.1 Installation Components Overview

No.	Figure	Item	Function
1		CarWave CB6A / CB6B Wireless Car Smart Box	Covert wired CarPlay / Android Auto connection to wireless.
2		USB A to USB C Cable: 27 cm / 10.63 inches	Connect the CB6 to the car stereo's CarPlay/Android Auto port.
3		USB C to USB C Cable: 27 cm / 10.63 inches	Connect CB6 to your car stereo's CarPlay/Android Auto port.
4		USB A to A Y-Cable: 80 cm / 31.50 inches	Connect to solves the problem of low power from some head unit USB ports, keeping the CB6 adapter working smoothly.

1.2 Why Do You Need a Y-Cable?

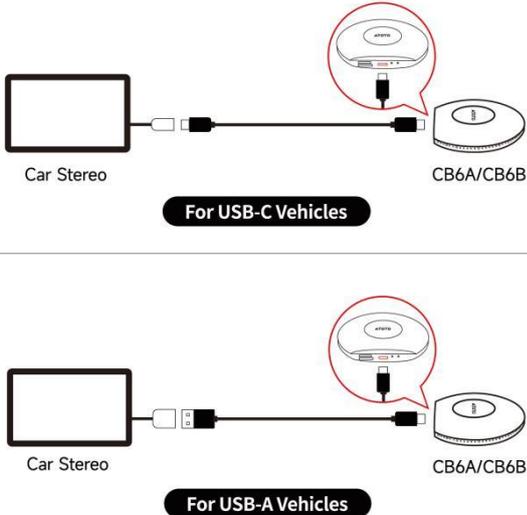
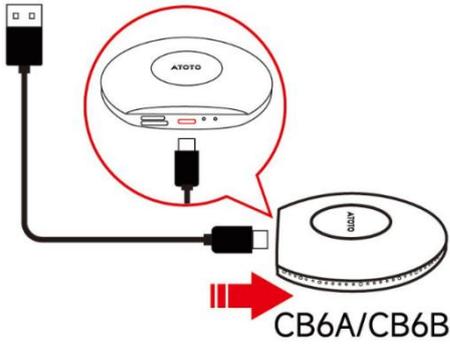
For vehicles, including but not limited to 2016-2020 Nissan, Isuzu, Camry, 2023 Toyota Crown, 2023 Lexus NX or Volkswagen, which may have insufficient power supply to support the CB6A/ CB6B adapter's normal operation. This may result in power-on failures or unexpected restarts.

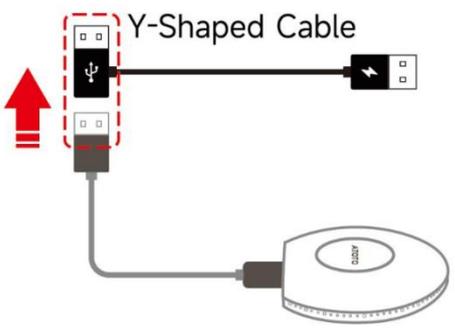
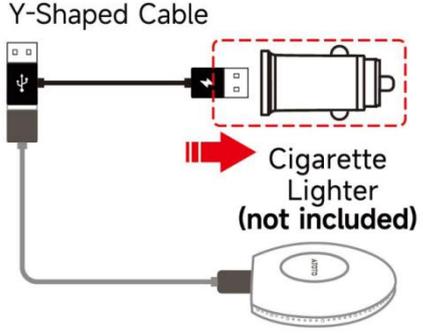
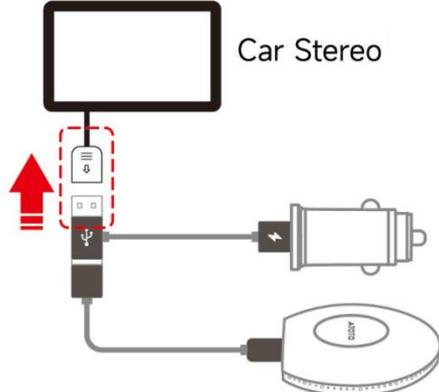
To address this issue, we include a **USB A to Type A Y-Shaped Cable** in the package. This cable connects to the vehicle's cigarette lighter socket to provide sufficient power, ensuring the CB6A/CB6B adapter operates reliably.

Key Benefits of the Y-Cable:

- **Improved Power Supply:** The **USB A to Type A Y-Shaped Cable** provides sufficient power from the cigarette lighter socket, ensuring the CB6 adapter functions properly.
- **Enhanced Stability:** It stabilizes the connection and ensures smooth operation, preventing interruptions caused by insufficient power supply.

1.3 Connection Process

No.	Operation	Figure
<p>Method 1: Standard Connection (For vehicles, including but not limited to 2016–2020 Nissan, Isuzu, Camry, 2023 Toyota Crown, 2023 Lexus NX or Volkswagen, which may have insufficient power supply or experience unexpected restarts, use the Y-shaped cable as described in Method 2.)</p>		
	<p>Use one of the provided USB cables (USB A to USB C or USB C to USB C) to connect the CB6A/CB6B and to the car stereo.</p>	
<p>Method 2: Enhanced Power from Cigarette Lighter via Y-Cable (For car stereos with a USB A port)</p>		
<p>1</p>	<p>Plug the Type C end of USB A to USB C Cable into the CB6A/CB6B.</p>	

<p>2</p>	<p>Plug the USB Male end of the USB A to USB C Cable into the Y-Shaped Cable.</p>	 <p>Y-Shaped Cable</p>
<p>3</p>	<p>Plug the USB Male end (with the attached cable) of the Y-Shaped Cable into the cigarette lighter port.</p>	 <p>Y-Shaped Cable</p> <p>Cigarette Lighter (not included)</p>
<p>4</p>	<p>Plug the USB Male end (with the USB Female) of the Y-Shaped Cable into the USB Female port of your car stereo.</p>	 <p>Car Stereo</p>
<p>Note: The cigarette lighter is not included in the CB6A/CB6B product package.</p>		

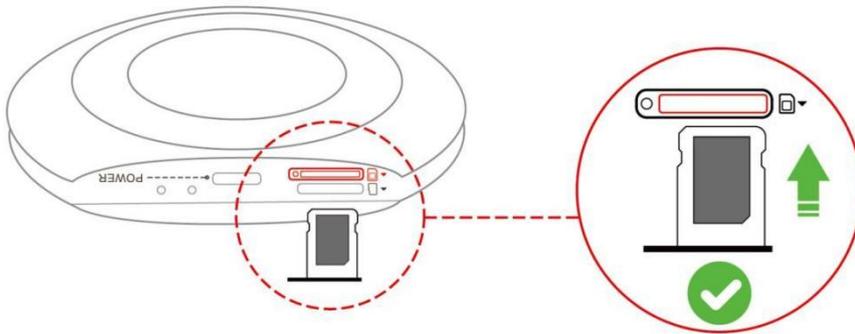
Chapter 2 Important Notice

Correct SIM Card Insertion Required

 **Incorrect insertion will damage the device and prevent it from functioning properly.**

 **Tip:** Inert the SIM card correctly on the first attempt.

Refer to the diagram below for the correct orientation of the SIM card.



 **WARNING:**

Incorrect insertion will permanently damage the device and immediately void the warranty. If you are unsure, please contact our support team at support@atotoglobal.com before proceeding.